


®

elmex

since 1963

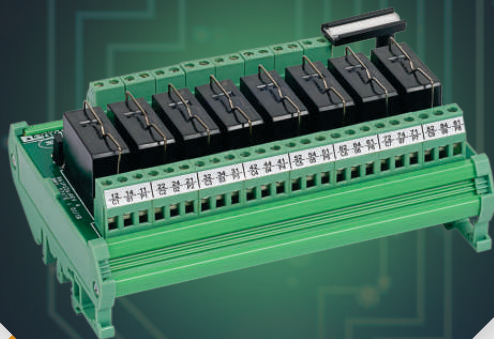

SOLUTIONS FOR CONTROL & INSTRUMENTATION



'elmex' is a pioneer in the field of Electrical wire Termination Technology in India. 'elmex' started its journey in 1963 as Manufacturer of Terminal Blocks (Din Rail Mounted Connectors) for the switchgear Industry. Steered on by the vision of our founder and chairman, Mr. J. D. Ray, Elmex has moved from strength to strength and is regarded as the leader in manufacturing terminal blocks in the country and further expanded their wings to overseas (more than 25 countries).

The steady and systematic growth coupled with the desire for incremental innovation, unfaltering customer service and steadily increasing manufacturing productivity has brought 'elmex' to its current level of competence, marked by a host of Global Approvals for the wide range of products. 'elmex' manufacturing plants are ISO 9001:2008 certified by TUV SUD South Asia Pvt. Ltd. 'elmex' techno - economic competitiveness has led many multinationals to choose 'elmex' as a global outsourcing partner. 'elmex' is regarded as trustworthy and reliable partner when it comes to product quality and efficient delivery schedules - all this is made possible because of the commitment and competence of Team 'elmex' and its desire for continuous improvement and innovations.

'elmex' brand equity is reflected by the fact that we serve most of the biggest names from national and multinational companies such as ABB, Alstom, Lucy Switchgear, Al Ahleia Switchgear, L & T, Simens, Schneider, Honeywell, GE, BHEL, NTPC, RDSO, Reliance, NPC and many more.

'elmex' manufacturing operations supported by fully computerized Design and Development Department for product design and tool design, Testing Laboratory for conducting tests according to international specifications, a Quality Management System (ISO 9001:2008) and an Environment Management System (ISO 14001:2004) operating throughout various 'elmex' units. Our marketing network is supported by more than 20 Resident Engineers catering to all over the country, various parts of the world and State of the Art facilities established at multi-locations in Vadodara.

We are pleased to introduced range of Relay Interface Boards, Relay Terminal Units, Timers and Measurement and Protection Relays for all applications of control, measurement and protection systems. They are serving vast range of application like over voltage, under voltage, over current, under current, phase failure, phase indication and other various functions required to be operated in measurement, control and protection applications. The manufacturing and testing facilities have been established to meet the requirements of applicable international standards and they are calibrated by NABL approved laboratory.

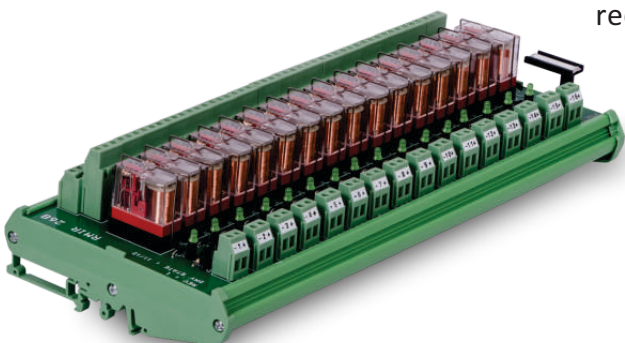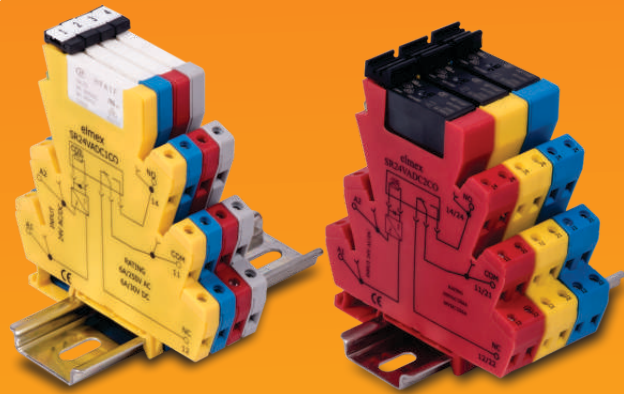

Timers

Star-Delta Timer (SDTMR)	4
Star-Delta Timer (SDTMR-2-230)	5
Star-Delta Timer (SDTMR-380)	6
On Delay Timer (ODTMR)	7
Off Delay Timer (OFFDTMR)	8
Multi-Function Timer (M5TMR)	9
Multi-Function Timer (MXTMR)	11

Protection Relays

Three Phase Under Voltage Relay (EM 3UVR-N)	13
Single Phase Under Voltage Relay (EM 1UVR-N)	14
Earth Leakage Monitoring Unit (ELMU)	15
Earth Leakage Monitoring Unit (ELMU-U)	16
Fan Current Monitoring Relay (FCM R5A)	17

Switching Mode Power Supply (EPU) 18

Transducer

Instrument Current Transducer (ICT)	19
Instrument Current Transducer (ICT-110)	20
Voltage Transducer (VT)	21

Relay Terminal Unit

Single Changeover Electromechanical 6.2mm	22
Two Changeover Electromechanical 14.5mm	23
Solid State 6.2 mm	24

Relay Interface Modules

Single Changeover	25
Two Changeover	26
Four Changeover	27

Maintenance Outlet Modules (MOM) 28

Signal Interface Modules


Diode Modules	30
---------------	----

Controller Interface Modules


Cable Harness Using D-sub Male/Female and FRC	31
---	----



Connection Diagram

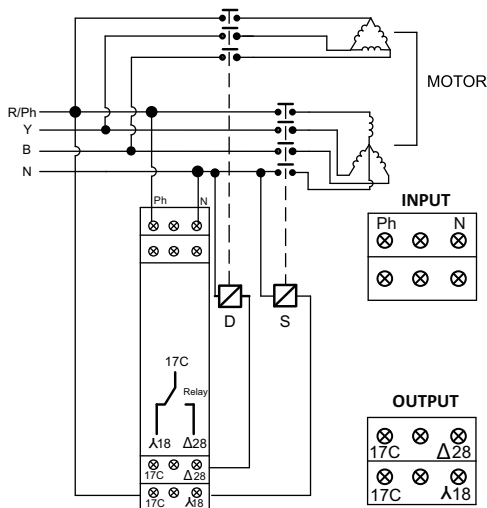

Functional Diagram

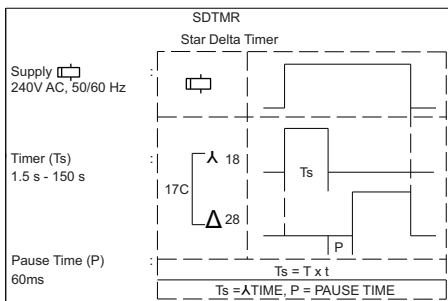

Application:

'elmex' make SDTMR is used with Star Delta starters and provides desired monitoring and control in Motor operations.

Salient Features:

- 17.5 mm DIN Rail Mount.
- Star-1 'NO'; Delta-1 'NO'
- Green LED for Star mode Indication.
- Red LED for Delta mode Indication.

Technical Specification

Supply Voltage

Supply Voltage Ph-N 220 / 230 / 240 V

Frequency Range 50 / 60 Hz

Power Consumption 15 VA Maximum

Delays

Delta mode on time delay (Ts) 1.5 sec to 150 sec

Pause Timing (P) 60 ms

Output Specifications

Output Contact Star-1 'NO'; Delta-1 'NO'

Contact Detail 1A @ 125VAC / 2A @ 30VDC

LED Indications

Star mode indication 3 mm Green LED

Delta mode indication 3 mm Red LED

Environmental Specifications

Temperature Operating: 0 to 50 °C (32 to 122 °F)

Storage: -20 to 75 °C (-4 to 167 °F)

Humidity (non-condensing) 95% RH

Protection Level IP40 for Casing

IP20 for Terminals

Housing

Material Polyamide 6,6


Colour Grey

Dimension 90 x 56.4 x 17.5

Mounting TS 35 DIN Rail




Connection Diagram

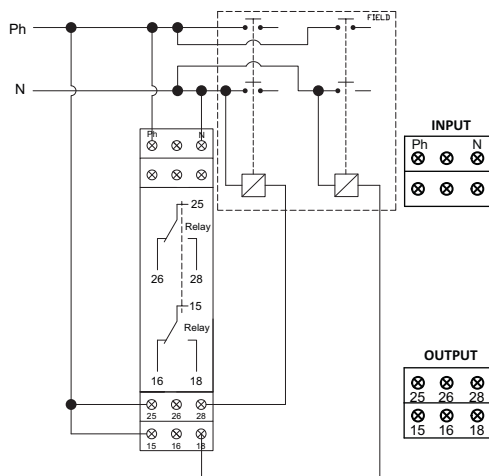

Functional Diagram

SDTMR-2-230 Star Delta Timer

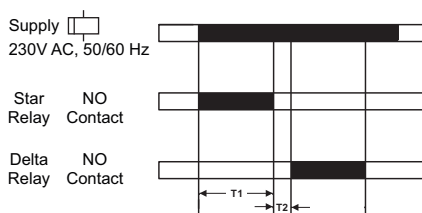

T1 = Run up time (3 - 30S, 6 - 60S)
T2 = Pause time (50 ms / 100 ms)

Application:

'elmex' Star Delta Timer is used for facilitating simple, Reliable and economical control for definite purpose solution in Industrial Application or in OEMs.

Salient Features:

- 17.5 mm DIN Rail Housing
- 1C/O Relay each for Star & Delta mode
- Green LED for Star mode Indication
- Red LED for Delta mode Indication

Technical Specification

Supply Voltage

Supply Voltage Ph-N	230 VAC
Frequency Range	50 / 60 Hz
Power Consumption	15 VAMaximum

Delays

Delta mode on time delay (Ts)	3-30S, 6-60s
Pause Timing (P)	50 ms / 100 ms

Output Specifications

Output Contact	1C/O Relay each for Star & Delta mode
Contact Detail	1A @ 125VAC / 2A @ 30VDC

LED Indications

Star mode indication	3 mm Green LED
Delta mode indication	3 mm Red LED

Environmental Specifications


Temperature	Operating: 0 to 50°C (32 to 122 °F) Storage: -20 to 75 °C (-4 to 167 °F)
Humidity (non-condensing)	95% RH
Protection Level	IP40 for Casing IP20 for Terminals

Housing


Material	Polyamide 6, 6
Colour	Grey
Dimension	90 x 56.4 x 17.5mm
Mounting	TS 35 DIN Rail



Connection Diagram

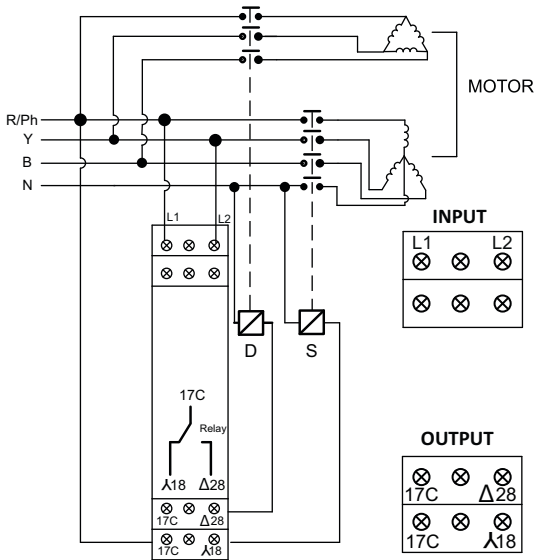

Functional Diagram

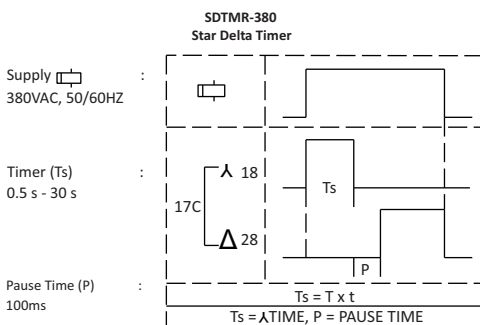

Application:

'elmex' Star Delta Timer is used for facilitating simple, Reliable and economical control for definite purpose solution in Industrial Application or in OEMs.

Salient Features:

- 17.5 mm DIN Rail Housing
- Star-1 'NO'; Delta-1 'NO'
- Green LED for Star mode Indication
- Red LED for Delta mode Indication

Technical Specification

Supply Voltage

Supply Voltage Ph-N	380 VAC
Frequency Range	50 / 60 Hz
Power Consumption	25 VAMaximum

Delays

Delta mode on time delay (Ts)	0.5sec to 30sec
Pause Timing (P)	100 ms

Output Specifications

Output Contact	Star-1 'NO'; Delta-1 'NO'
Contact Detail	5A @ 230VAC / 5A @ 30VDC

LED Indications

Star mode indication	3 mm Green LED
Delta mode indication	3 mm Red LED

Environmental Specifications


Temperature	Operating: 0 to 50°C (32 to 122 °F) Storage: -20 to 75 °C (-4 to 167 °F)
Humidity (non-condensing)	95% RH
Protection Level	IP40 for Casing IP20 for Terminals

Housing


Material	Polyamide 6, 6
Colour	Grey
Dimension	90 x 56.4 x 17.5mm
Mounting	TS 35 DIN Rail



Connection Diagram

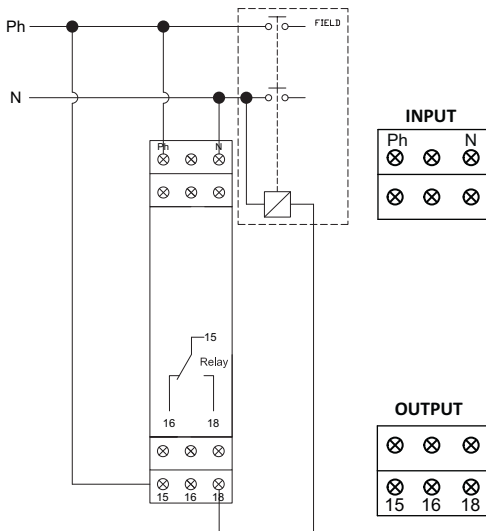

Functional Diagram

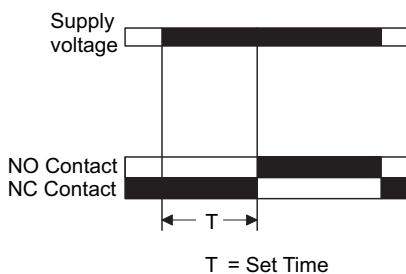

Application:

'elmex' On Delay timer is used for facilitating simple, Reliable and economical control for definite purpose solution in industrial Application or in OEMs.

Salient Features:

- 17.5 mm DIN Rail Mount.
- On Delay.
- 10 Time Ranges.
- Front knobs for Time Range & Time Scale.
- Slim, Space Saving Design.

Technical Specification

Supply Voltage

Supply Voltage Ph-N	240V AC
Frequency Range	50 / 60 Hz
Power Consumption	12VA max

Input Specifications

Accuracy	Settings: $\pm 5\%$ of F.S.
	Repeat: $\pm 0.5\%$ (F.S.=FullScale)
Reset	Reset time < 100msec

Output Specifications

Output Contact	SPDT (1C/O) Relay
Contact Rating	NO/5A, NC/3A @ 250V AC

LED Indications

Power On	3mm Green LED
Relay On	3mm Red LED

Functional Specifications

Mode	On Delay
Time Ranges	0.1 - 1sec, 0.3 - 3sec, 1 - 10sec, 3 - 30sec, 0.1 - 1min, 0.3 - 3 min, 1 - 10min 3 - 30 min, 0.1 - 1 hr, 0.3 - 3hr

Environmental Specifications


Temperature	Operating: 0 to 50 °C (32 to 122 °F) Storage: -20 to 75 °C (-4 to 167 °F)
Humidity (non-condensing)	95% RH
Protection Level	IP40 for Casing IP20 for Terminals

Housing


Material	Polyamide 6,6
Colour	Grey
Dimension	90x56.4x17.5
Mounting	TS 35 DIN Rail



Connection Diagram

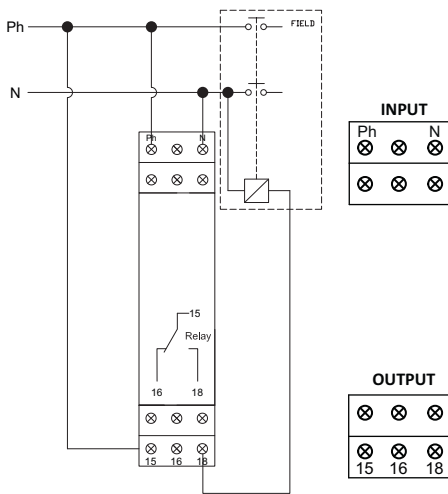

Functional Diagram

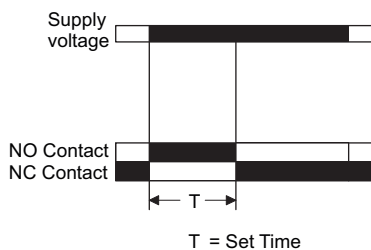

Application:

'elmex' Off Delay timer is used for facilitating simple, Reliable and economical control for definite purpose solution in industrial Application or in OEMs.

Salient Features:

- 17.5 mm DIN Rail Mount.
- Off Delay.
- 10 Time Ranges.
- Front knobs for Time Range & Time Scale.
- Slim, Space Saving Design.

Technical Specification

Supply Voltage

Supply Voltage Ph-N	240V AC
Frequency Range	50 / 60 Hz
Power Consumption	12VA max

Input Specifications

Accuracy	Settings: $\pm 5\%$ of F.S. Repeat: $\pm 0.5\%$ (F.S.=FullScale)
Reset	Reset time < 100msec

Output Specifications

Output Contact	SPDT (1C/O) Relay
Contact Rating	NO/5A, NC/3A @ 250V AC

LED Indications

Power On	3mm Green LED
Relay On	3mm Red LED

Functional Specifications

Mode	Off Delay
Time Ranges	0.1 - 1sec, 0.3 - 3sec, 1 - 10sec, 3 - 30sec, 0.1 - 1min, 0.3 - 3 min, 1 - 10min 3 - 30 min, 0.1 - 1 hr, 0.3 - 3hr

Environmental Specifications


Temperature	Operating: 0 to 50 °C (32 to 122 °F) Storage: -20 to 75 °C (-4 to 167 °F)
Humidity (non-condensing)	95% RH
Protection Level	IP40 for Casing IP20 for Terminals

Housing

Material	Polyamide 6,6
Colour	Grey
Dimension	90x56.4x17.5
Mounting	TS 35 DIN Rail



Connection Diagram

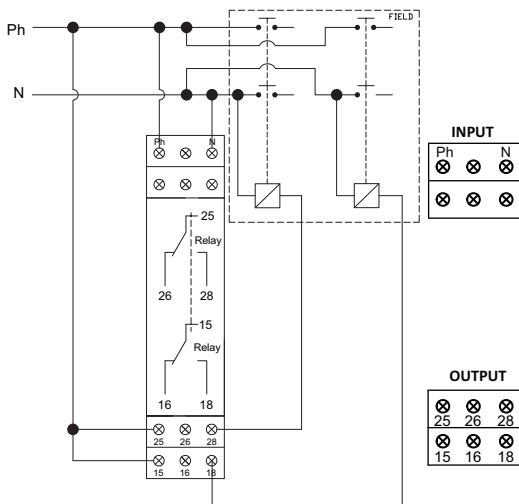

Application:

'elmex' Multi-Function timer is used for facilitating simple, Reliable and economical control for definite purpose solution in Industrial Application or in OEMs.

Salient Features:

- 17.5 mm DIN Rail Mount.
- 5 Function.
- 10 Time Ranges.
- Front knobs for Time Range, Time Scale & Mode Setting.
- Slim, Space Saving Design.

Technical Specification

Supply Voltage

Supply Voltage	240V AC
Frequency Range	50 / 60 Hz
Power consumption	12 VA max

Input Specifications

Accuracy	Settings: $\pm 5\%$ of F.S. Repeat: $\pm 0.5\%$ (F.S.=FullScale)
Reset	Reset time < 100msec

Output Specifications

Output Contact	DPDT (2 C/O) Relay
Contact Rating	NO/5A, NC/3A @ 250V AC

LED Indications

Power On	3mm Green LED
Relay On	3mm Red LED

Functional Specifications

Modes	On Delay (A)
	Interval (B)
	Cyclic equal OFF first (C)
	Cyclic equal ON first (Ci)
Time Ranges	Pulse output (D)
	0.1 - 1sec, 0.3 - 3sec,
	1 - 10sec, 3 - 30sec, 0.1 - 1min,
	0.3 - 3 min, 1 - 10min
	3 - 30 min, 0.1 - 1 hr, 0.3 - 3hr






Environmental Specifications

Temperature	Operating: 0 to 50 °C (32 to 122 °F) Storage: -20 to 75 °C (-4 to 167 °F)
Humidity (non-condensing)	95% RH
Protection Level	IP40 for Casing IP20 for Terminals

Housing


Material	Polyamide 6,6
Colour	Grey
Dimension	90x56.4x17.5
Mounting	TS 35 DIN Rail

Functional Diagram

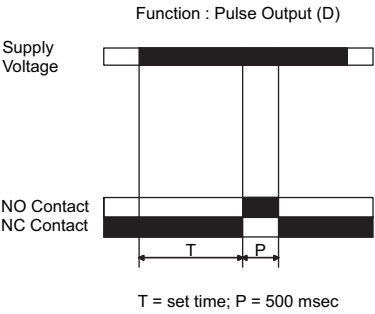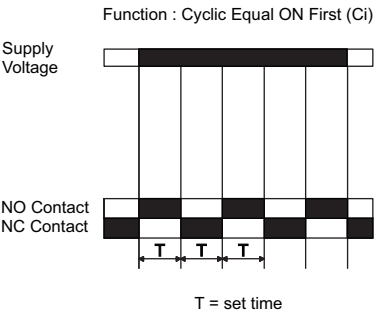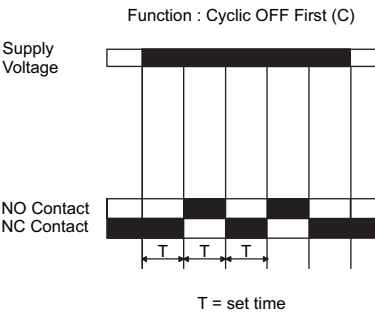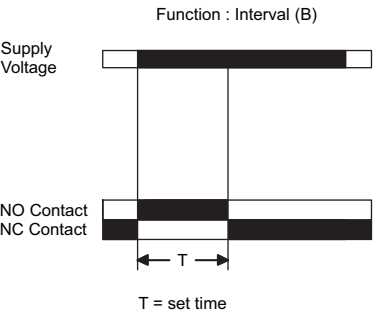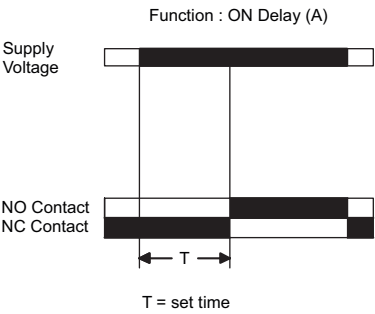



Connection Diagram

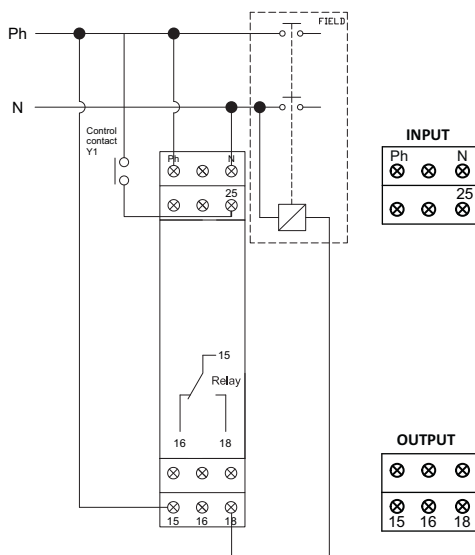

Application:

'elmex' Multi-Function timer is used for facilitating simple, Reliable and economical control for definite purpose solution in Industrial Application or in OEMs.

Salient Features:

- 17.5 mm DIN Rail Mount.
- 13 Function.
- 10 Time Ranges.
- Front knobs for Time Range & Time Scale & Mode Setting.
- Slim, Space Saving Design.

Technical Specification

Supply Voltage

Supply Voltage	240V AC
Frequency Range	50 / 60 Hz
Power consumption	12 VA max

Input Specifications

Accuracy	Settings: $\pm 5\%$ of F.S. Repeat: $\pm 0.5\%$ (F.S.=Full Scale)
Reset	Reset time < 100msec

Output Specifications

Output Contact	SPDT(1C/O) Relay
Contact Rating	NO/5A, NC/3A@250V AC

LED Indications

Power On	3mm Green LED
Relay On	3mm Red LED

Functional Specifications

Modes	On Delay (A)
	Interval (B)
	Cyclic equal OFF first (C)
	Cyclic equal ON first (CI)
	Pulse output (D)
	Delay on break (E)
	Delay on make / Break (F)
	Interval after break (H)
	Single Shot (I)
	Retriggerable Single shot(J)
Time Ranges	Latching Relay (K)
	Delay with Totalise (Ai)
	Interval with Totalise (Bi)
	0.1 - 1sec, 0.3 - 3sec,
	1 - 10sec, 3 - 30sec, 0.1 - 1min,
	0.3 - 3 min, 1 - 10min
	3 - 30 min, 0.1 - 1 hr, 0.3 - 3hr


Environmental Specifications

Temperature	Operating: 0 to 50 °C(32 to 122 °F) Storage: -20 to 75 °C(-4 to 167 °F)
Humidity (Non-Condensing)	95% RH
Protection Level	IP40 for Casing IP20 for Terminals


Housing

Material	Polyamide 6,6
Colour	Grey
Dimension	90x56.4x17.5
Mounting	TS 35 DIN Rail


Function : ON Delay (A)

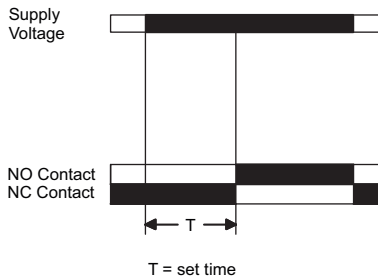


Function : Interval (B)

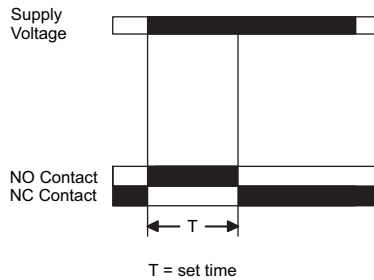


Function : Cyclic OFF First (C)

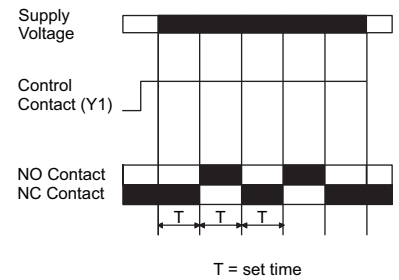


Function : Cyclic Equal ON First (Ci)

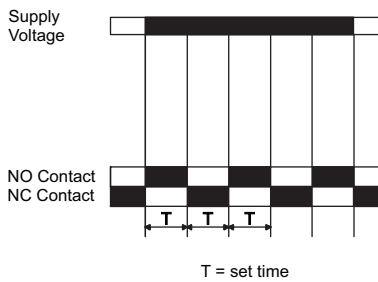


Function : Pulse Output (D)

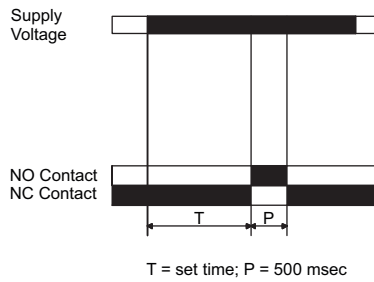


Function : Delay On Break (E)

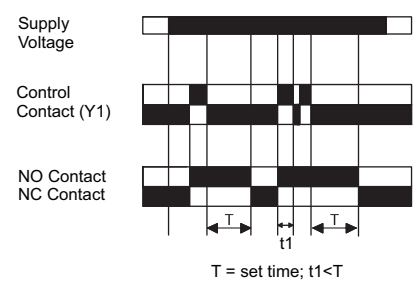


Function : Delay On Make / Break (F)

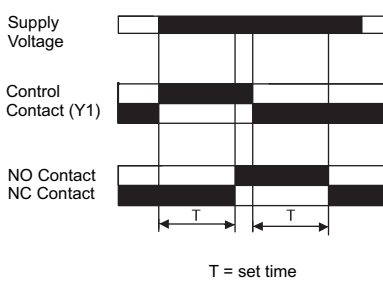


Function : Interval After Break (H)

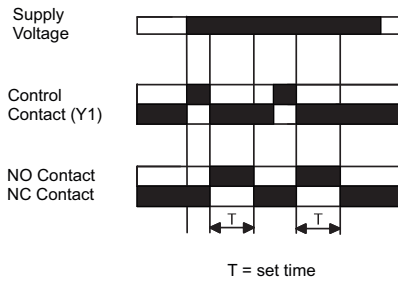


Function : Single shot (I)

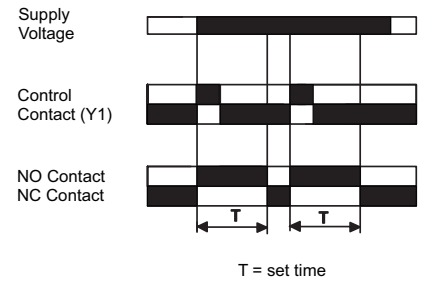


Function : Retriggerable Single shot (J)

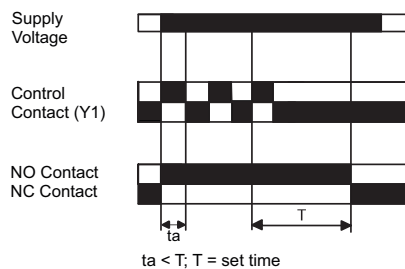


Function : Latching Relay (K)

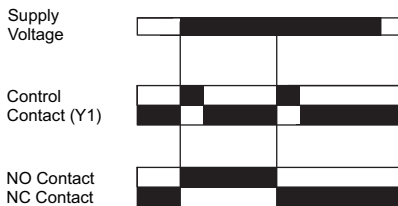

Function : Delay with Totalise (Ai)

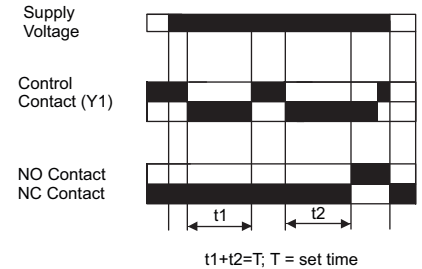

Function : Interval with Totalise (Bi)

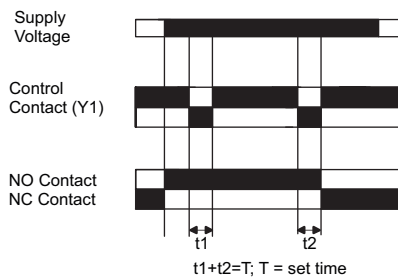


Protection Relays


Three Phase Under Voltage Relay (EM 3UVR-N)



Connection Diagram

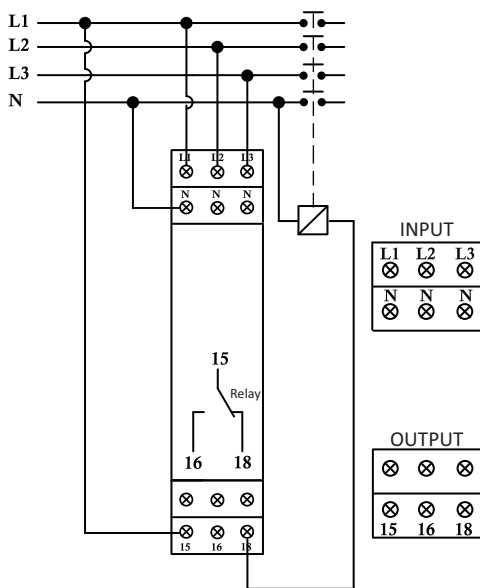

Functional Diagram

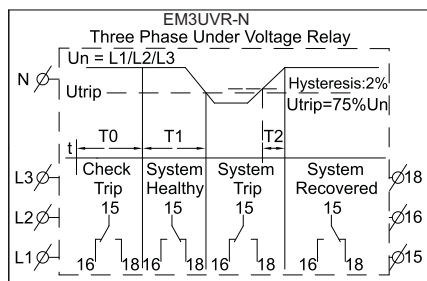

Application:

'elmex' UVR is used for highly fluctuating inductive load such as Air Conditioning system in Industrial and commercial establishments. It protects the system equipment and load from sudden over voltage fluctuations.

Salient Features:

- 17.5 mm DIN Rail Mount.
- Self - Powered Protection Relay.
- 1x SPDT Relay Output.
- Robust Universal power supply.
- Green LED for supply healthy indication.
- Red LED for healthy sensing indication.
- 12 bit sensing.

Technical Specification

Supply Voltage

Supply / Monitoring Voltage 220 / 230 / 240*
(Un) L1 / L2 / L3 - N

Frequency Range 48 / 63 Hz

Power consumption 5 VA Maximum

Monitoring Mode Under Voltage

Trip Level (U trip) 75% of Un (Factory Set)

Hysteresis 2% (Factory Set)

Setting Accuracy + 4%

Delays

Power On Delay (t) 5 Mins (Min) to 15 mins (Max)

From Trip to recovery Time Delay (T2) 5 Mins (Min) to 15 mins (Max)
(Settable by linear potentiometer)

Output Specifications

Output Contact SPDT Relay

Contact Rating 1A @125VAC / 2A @30 VDC

LED Indications

Power On 3mm Green LED

Healthy Indications 3mm Red LED

Housing

Material Polyamide 6,6

Colour Grey

Dimension 90x56.4x17.5

Mounting TS 35 DIN Rail


*Supply / Mounting Voltage (Un) Refers to The Phase to Neutral Nominal Voltage For Product and It's Variants. Product Needs 3Ø, 4 - Wire Connections System. Hence For Reference Purpose Phase to Phase Voltage Can be Calculated by Multiplying Stated Values by v3.

Protection Relays


Single Phase Under Voltage Relay (EM 1UVR-N)



Connection Diagram

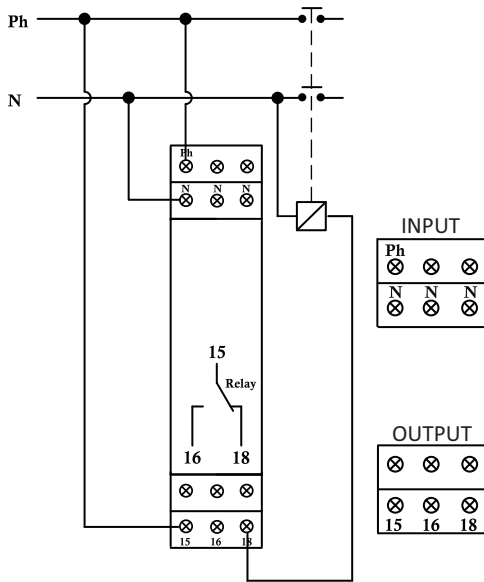

Functional Diagram

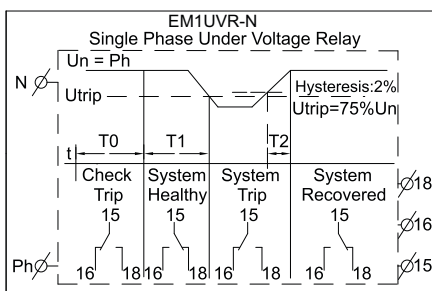

Application:

'elmex' UVR is used for highly fluctuating inductive load such as Air Conditioning system in Industrial and commercial establishments. It protects the system equipment and load from sudden over voltage fluctuations.

Salient Features:

- 17.5 mm wide DIN Rail Housing.
- Self - Powered Protection Relay.
- 1x SPDT Relay Output.
- Robust Universal power supply.
- Green LED for supply healthy indication.
- Red LED for healthy sensing indication.
- 12 bit sensing.

Technical Specification

Supply Voltage

Supply / Monitoring Voltage 220 / 230 / 240*
(Un) Ph - N

Frequency Range 48-63 Hz

Power consumption 5 VA Maximum

Monitoring Mode Under Voltage

Trip Level (U_{trip}) 75% of U_n (Factory Set)

Hysteresis 2% (Factory Set)

Setting Accuracy + 4%

Delays

Power On Delay (t) 5 Mins (Min) to 15 mins (Max)

From Trip to recovery Time Delay (T2) 5 Mins (Min) to 15 mins (Max)
(Settable by linear potentiometer)

Output Specifications

Output Contact SPDT Relay

Contact Rating 1A @125VAC / 2A @30 VDC

LED Indications

Power On 3mm Green LED

Healthy Indications 3mm Red LED

Housing


Material Polyamide 6,6

Colour Grey




Dimension 90x56.4x17.5

Mounting TS 35 DIN Rail

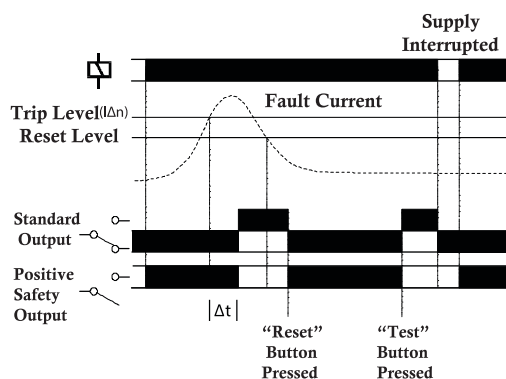*Supply / Mounting Voltage (U_n) Refers to The Phase to Neutral Nominal Voltage For Product and It's Variants. Product Needs 1Ø, 2 - Wire Connections System.



Functional Diagram


		S.O.				P.S.O.		CBCT		N.U.				
NO	P	NC	P	O	S1	S2	-	-	-	-	-	-		
12	13	14	15	16	17	18	19	20	21	22				
230V AC $\pm 15\%$, 50/60Hz									N.U.					
A1	-	A2	-	TEST	RESET	-	-	-	-	-	-	-		
1	2	3	4	5	6	7	8	9	10	11				


- 70 mm wide DIN Rail / Panel mount Housing.
- Designed to monitor & detect true RMS earth fault currents in conjunction with separate toroid.
- LED bar-graph provides constant indication of any leakage current.
- Microprocessor controlled with internal monitoring (Self-checking)
- Adjustable sensitivity ($I_{\Delta n}$) and Time Delay (Δt) - 0 (Instantaneous) to 10 seconds.
- Separate "Test" and "Reset" push buttons.
- Connection facility for remote "Test" and "Rest" push buttons or N.O contacts.
- 2 Relay Outputs - Standard output (S.O) and positive safe output (P.S.O)
- Led indication of supply status and fault condition after unit has tripped.

Mounting	TS 35 DIN Rail
----------	----------------




Connection Diagram

A	N.U					
			NC	P	NO	
7	8	9	10	11	12	
90-275 VAC/DC			T	R	CBCT	
A1	A2	S1			S2	
1	2	3	4	5	6	



Functional Diagram

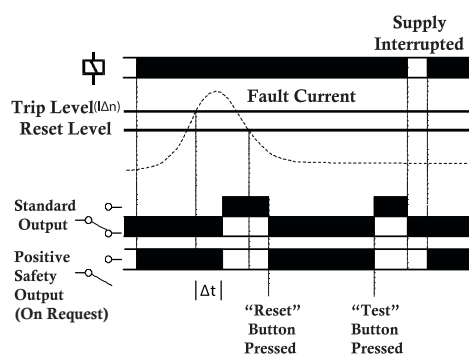

Application:

'elmex' make Earth Leakage monitoring Relay facilitates measuring of Earth Leakage Current and used with *'elmex'* make Core Balance Current Transformers.

Salient Features:

- Universal power supply.
- 35 mm wide DIN Rail Housing.
- Designed to monitor & detect true RMS earth fault currents in conjunction with separate toroid.
- LED bar-graph provides constant indication of any leakage current.
- Microprocessor controlled with internal monitoring(Self - checking).
- Adjustable sensitivity ($I_{\Delta n}$) and Time Delay (Δt) - 0 (Instantaneous) to 10 seconds.
- Separate "Test" and "Reset" push buttons.
- Connection facility for remote "Test" and "Reset" push buttons or N.O contacts.
- 1 Relay Output - Standard output (S.O) & Positive safety output relay on request.
- LED indication of supply status and fault condition after unit has tripped.

Technical Specification

Supply voltage - A1 - A2	: 90-275Vac/dc
Frequency Range	: 50/60Hz
Power Consumption	: < 5VA
Monitoring Mode	: Leakage current
Monitored leakage current	: Up to 30A
Trip Level limits	: 80 - 90% of I _{Δn}
Reset Value	: = 85 % of tripped level
Time delay Δt	: 0, 60, 150, 250, 500, 800mS, 1, 2.5, 5, 10 sec. (user selectable)
Output	: 1 x SPDT relay (1 FORM C)
Output rating	: S.O. (NO: 10A@277VAC/ 28VDC) (NC: 5A@250VAC)

LED Indications

Power On	: 3mm Green LED
Bargraph	: 3x3mm Green LED (25, 50 and 75% of actual trip level)
Tripped	: 3mm Red LED
ELMU healthy	: 3mm Red LED (Blinking)

Housing


Material	: UL - 94V0
Colour	: Light Gray
Dimension (LxWxH)	: 59 x 35x 91mm
Din rail enclosure component	: Poly carbonate
Mounting	: TS 35 DIN Rail

Protection Relays


Fan Current Monitoring Relay (FCMR5A)



Connection Diagram

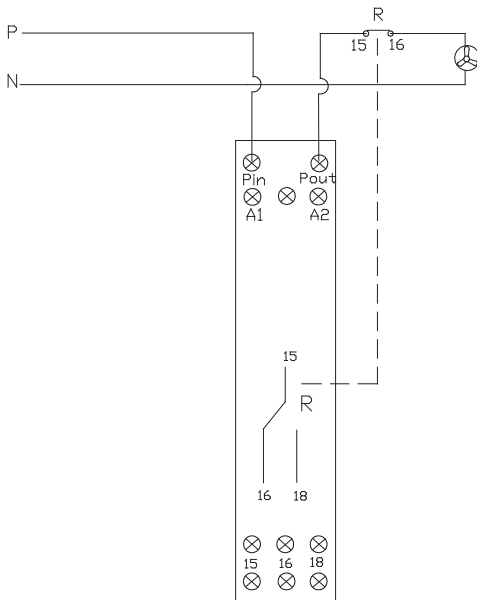

Functional Diagram

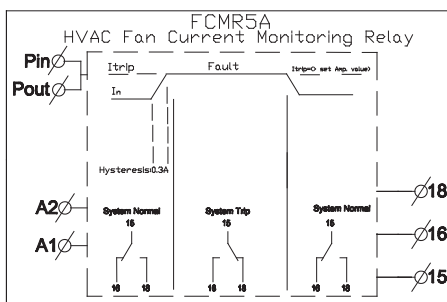

Application:

'elmex' Fan Current Monitoring Relay is used for instant acknowledgment of errors within the system to improve operational efficiency isolating the erroneous equipment from the system. This way it is useful in decreasing downtime of the system.

Salient Features:

- 17.5 mm DIN Rail Housing.
- 1x SPDT Relay Output.
- Inrush current protection.
- Green LED for supply indication
- Red LED for trip indication.
- Sensing with hysteresis.

Technical Specification

Supply Voltage

Supply voltage / Control signal 24 VAC
(A1-A2)

Frequency Range 50 / 60 Hz

Power Consumption 4 VA Maximum

Current Sensing Range 0-5 Amp

Trip Level (I trip) > Set ampere value

Hysteresis 4%

Setting Accuracy +/- 7%

Output Specifications

Output Contact SPDT Relay

Contact Rating 1A @125VAC / 2A @30VDC

LED Indications

Power On 3mm Green LED

Healthy Indication 3mm Red LED

Environmental Specifications

Temperature Operating: 0 to 50 °C(32 to 122 °F)

Storage: -20 to 75 °C(-4 to 167 °F)

Humidity (Non-Condensing) 95% RH

Protection Level IP40 for Casing

IP20 for Terminals

Housing

Material Polyamide 6,6

Colour Grey

Dimension 90x56.4x17.5

Mounting TS 35 DIN Rail



Salient Features:

- Enclosed Type
- Universal AC input
- Installation on DIN rail 35mm
- Over voltage protection
- Over current protection
- LED indicator for DC power ON
- LED indicator for DC low

Applications:

'elmex' SMPS have high efficiency & are widely used in a variety of electronic equipment like panels and other sensitive equipment requiring stable and efficient power supply.

Sr.No.	Product code	Description	Dimension H x W x D in mm	Weight in gm
1	EPU15-24	Input: AC100-240V, 50/60Hz (47 ~ 63Hz) Output: 24Vdc, 0.65A	108 x 22.5 x 95	200
2	EPU50-24	Input: AC100-240V, 50/60Hz (47 ~ 63Hz) Output: 24Vdc, 2.2A	130 x 30 x 125	570
3	EPU120-24	Input: AC100-240V, 50/60Hz (47 ~ 63Hz) Output: 24Vdc, 5A	130 x 40 x 125	800
4	EPU240-24	Input: AC100-240V, 50/60Hz (47 ~ 63Hz) Output: 24Vdc, 10A	130 x 60 x 125	1200

*H increase by 6mm with mounting clip.

Genera Data

Connection: Wire Size(Flexible & Rigid) - 0.2 Sq. mm to 4 Sq. mm.

Dielectric Strength: AC 3,000V for 1 minute between input and output (At room temperature & Humidity).
AC 2,000V 1 minute between input and body (At room temperature & Humidity).
AC 500V 1 minute between output and body (At room temperature & Humidity).


Cooling: Convention Cooling

Insulation Resistance: DC 500V 100MΩ (At room temperature & Humidity)

Safety Regulation: UL




Connection Diagram

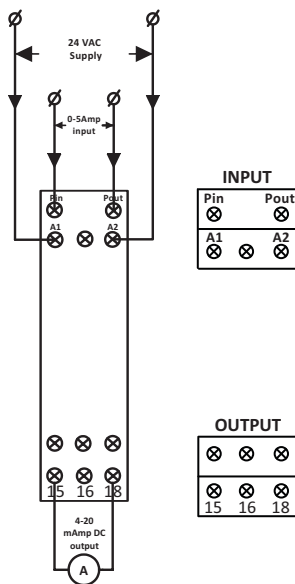

Functional Diagram

INSTRUMENT CURRENT TRANSDUCER

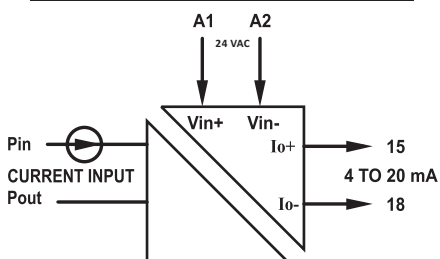

Application:

'elmex' make instrument current transducer sense CT secondary current and provide linear 4-20 mA DC signal for PLC/SCADA application.

Salient Features:

- 17.5 mm DIN Rail Housing.
- Inrush current protection.
- Green LED for supply indication.
- Galvanic Isolation between current input and output.

Technical Specification

Supply Voltage

Supply voltage (A1-A2)	24 V AC
Current input / Sensing current (Pin - Pout)	0-5 Amp

Frequency Range	50 / 60 Hz
Power Consumption	4 VA Maximum

Output

Output between terminal No. 15 and 18	4 to 20 mA
Setting accuracy	$\pm 2.5\%$

LED Indication

Power On / Healthy	3mm Green LED
--------------------	---------------

Environmental Specifications


Temperature	Operating: 0 to 50 °C(32 to 122 °F) Storage: -20 to 75 °C(-4 to 167 °F)
Humidity (Non-Condensing)	95% RH
Protection Level	IP40 for Casing IP20 for Terminals

Housing


Material	Polyamide 6,6
Colour	Grey
Dimension	90x56.4x17.5
Mounting	TS 35 DIN Rail



Connection Diagram

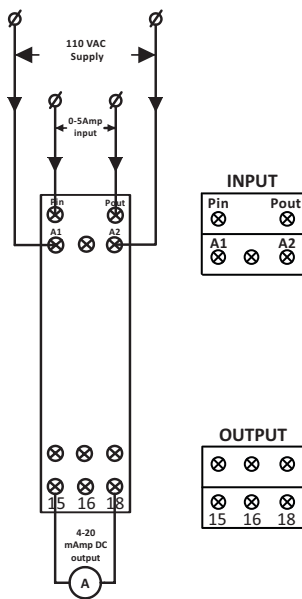

Functional Diagram

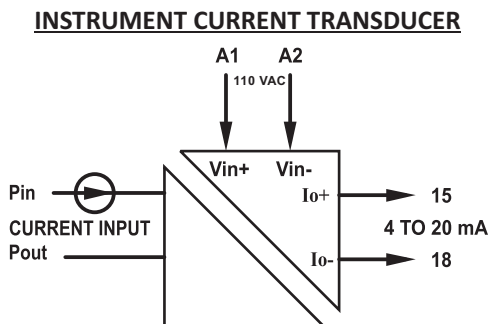

Application:

'elmex' make instrument current transducer sense CT secondary current and provide linear 4-20 mA DC signal for PLC/SCADA application.

Salient Features:

- 17.5 mm DIN Rail Housing.
- Inrush current protection.
- Green LED for supply indication.
- Galvanic Isolation between current input and output.

Technical Specification

Supply Voltage

Supply voltage (A1-A2)	110V AC
Current input / Sensing current (Pin - Pout)	0-5 Amp

Frequency Range	50 / 60 Hz
-----------------	------------

Power Consumption	5.5 VA Maximum
-------------------	----------------

Output

Output between terminal No. 15 and 18	4 to 20 mA
Setting accuracy	$\pm 2.5\%$

LED Indication

Power On / Healthy	3mm Green LED
--------------------	---------------

Environmental Specifications

Temperature	Operating: 0 to 50 °C(32 to 122 °F) Storage: -20 to 75 °C(-4 to 167 °F)
Humidity (Non-Condensing)	95% RH
Protection Level	IP40 for Casing IP20 for Terminals

Housing

Material	Polyamide 6,6
Colour	Grey
Dimension	90x56.4x17.5
Mounting	TS 35 DIN Rail




Connection Diagram

1-5 VDC		4-20 mA FROM 1-5 VDC		2-10 VDC		4-20 mA FROM 2-10 VDC		N.U			
Vo1+	Vo1-	Io1+	Io1-	Vo2+	Vo2-	Io2+	Io2-	-	-	-	-
12	13	14	15	16	17	18	19	20	21	22	

<p>POWER ON <input type="checkbox"/></p> <p>OFF ON</p> <p>110V AC 220V AC 240V AC 415V AC 500V AC NOT USED</p>											
--	--	--	--	--	--	--	--	--	--	--	--

230VAC ± 10%, 50/60Hz				N.U			SENSING VOLTAGE				
Ph	N	-	-	-	-	-	VSph	VSN	-	-	-
1	2	3	4	5	6	7	8	9	10	11	

Functional Diagram

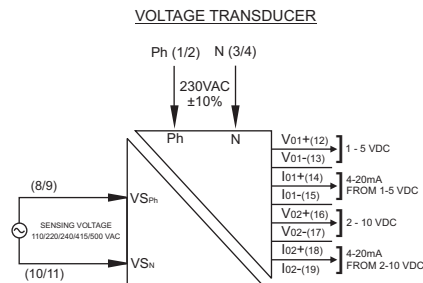

Application:

'elmex' make instrument voltage transducer sense PT secondary voltage and provide linear 1-5VDC and 4-20 mA DC signal for PLC/SCADA application.

Salient Features:

- 70mm wide DIN Rail / Panel Mount Housing.
- Inrush Current Protection.
- Galvanic Isolation between input voltage signal and output voltage & current signals.
- User Selectable Voltage Range.

Technical Specification

Input Specifications

Auxiliary Supply Voltage (Ph - N)	230 VAC (±10%)
Sensing Voltage ($VS_{ph} - VS_N$)	110 / 220 / 240 / 415 / 500 VAC
Frequency Range	50 / 60 Hz
Power Consumption	< 4 VA
(For Auxiliary Supply Voltage)	

Output

Output between terminal No. 12 & 13	1 - 5 VDC
Output between terminal No. 14 & 15	4 - 20 mA @ 1 - 5 VDC
Output between terminal No. 16 & 17	2 - 10 VDC
Output between terminal No. 18 & 19	4 - 20 mA @ 2 - 10 VDC
Output Accuracy	± 3%


LED Indication

Power On	Red LED
----------	---------



Housing

Housing Material	ABS UL-94-V0
Colour	Light Grey
Dimension (L x W x H) in mm	58.4 x 70 x 91 mm
Din Rail Enclosure Component	Polycarbonate
Mounting	TS 35 DIN Rail

***Note:** Voltage Range has to be selected before energizing the unit.

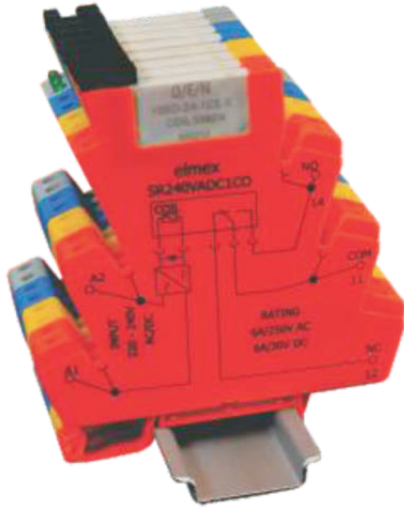


Applications

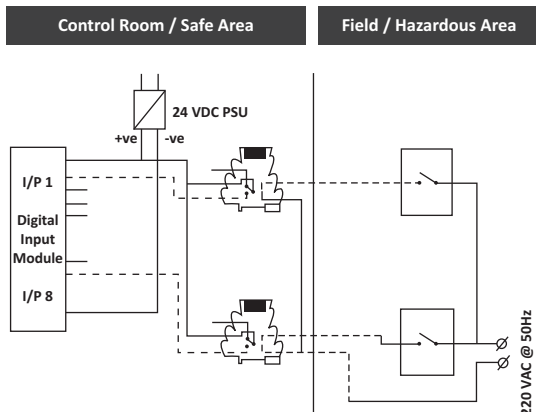
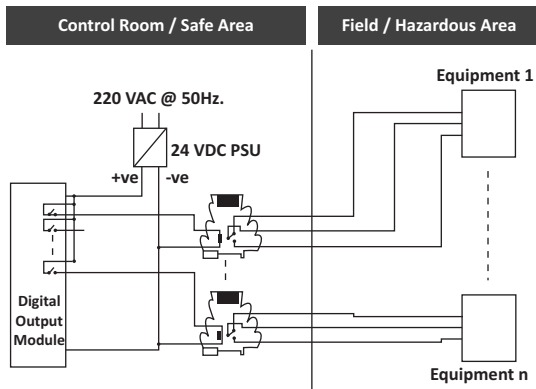


Versions		
	SR 24 V ADC 1 CO	SR 240 V ADC 1 CO
Base Unit		
Pitch (in mm)	6.2	
Dimension (Height x width) (in mm)	91.50 x 88.20	
Connection Poles	2 Coil Side	
	3 Contact Side	
Connection Possibility	2.5 Sq. mm.	
Screw Size	M 2.6	
Torque	0.4 Nm	
Relay Actuation Data		
Nominal Voltage (Vn) to actuate	24 V DC / AC	220 V DC / AC
Must Pick up Voltage	18 V DC / AC	190 V DC / AC
Must Drop Voltage	4 V DC / AC	35 V DC / AC
Nominal Current (In) to actuate	10 mA	15 mA
Contact Data		
Contact Rating	6 A, 250 VAC / 30 VDC	
Compatible Contact Arrangement	1 From C	
Contact Material	AgNi / AgSnO ₂	
Contact Resistance	100 mΩ @ 6 VDC, 1 A	
Maximum Switching Power	1500 VA / 180 W	
Relay Endurance Data		
Mechanical	6 x 10 ⁴ for Normal Open Contact	
Electrical (Ohmic)	3 x 10 ⁴ for Normal Open Contact	
Insulation of Relay		
Resistance (Initial)	Minimum 1000 MΩ at 500 VDC	
Dielectric Strength	1000 VAC (50Hz.) for 1 Minute	
Others		
Operating Temperature	-20°C to 55°C	


Two Changeover Electromechanical 14.5mm Relay Terminal Unit

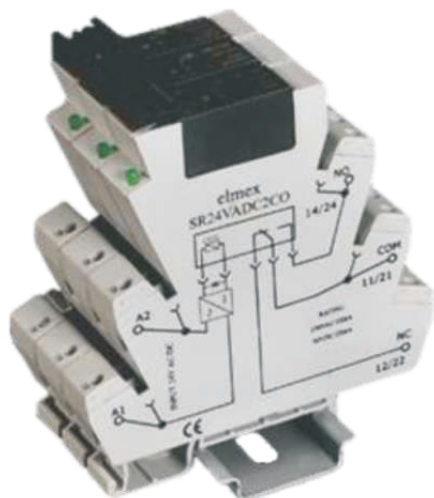

Applications

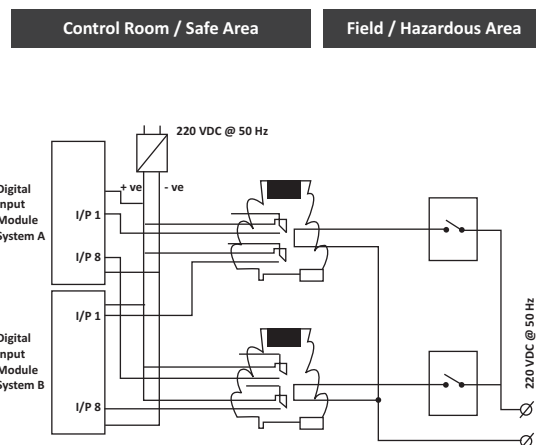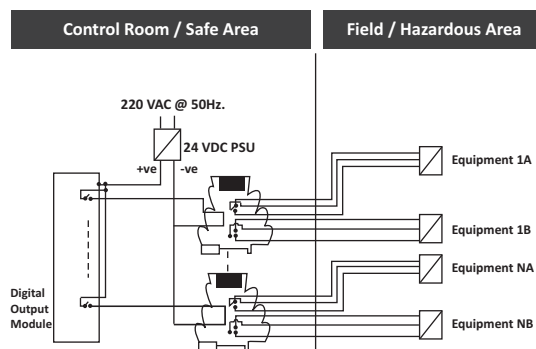


Versions		
	SR 24 V ADC 2 CO	SR 240 V ADC 2 CO
Base Unit		
Pitch (in mm)	14.5	
Dimension (Height x width) (in mm)	91.50 x 88.20	
Connection Poles	2 Coil Side	
	3 Contact Side	
Connection Possibility	2.5 Sq. mm.	
Screw Size	M 2.6	
Torque	0.4 Nm	
Relay Actuation Data		
Nominal Voltage (Vn) to actuate	24 V DC / AC	220 V DC / AC
Must Pick up Voltage	19 V DC / AC	200 V DC / AC
Must Drop Voltage	4 V DC / AC	50 V DC / AC
Nominal Current (In) to actuate	25 mA	10 mA
Contact Data		
Contact Rating	2x6 A, 250 VAC / 30 VDC	
Compatible Contact Arrangement	2 From C	
Contact Material	AgCdO/AgSnO ₂	
Contact Resistance	100 mΩ @ 6 VDC, 1 A	
Maximum Switching Power	1500 VA (per contact)	
Relay Endurance Data		
Mechanical	1 x 10 ⁷	
Electrical (Ohmic)	1 x 10 ⁵	
Insulation of Relay		
Resistance (Initial)	Minimum 1000 MΩ at 500 VDC	
Dielectric Strength	1000 VAC (50Hz.) for 1 Minute	
Others		
Operating Temperature	-20°C to 55°C	

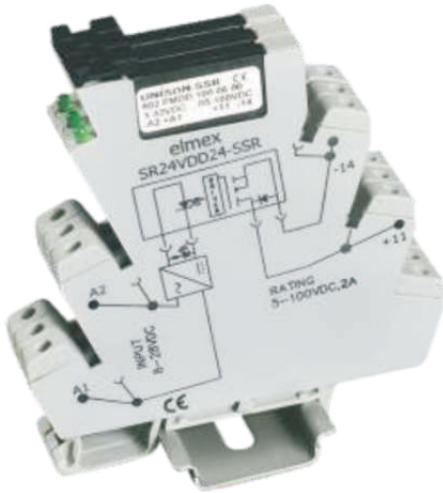

Applications


Control Room / Safe Area

Field / Hazardous Area

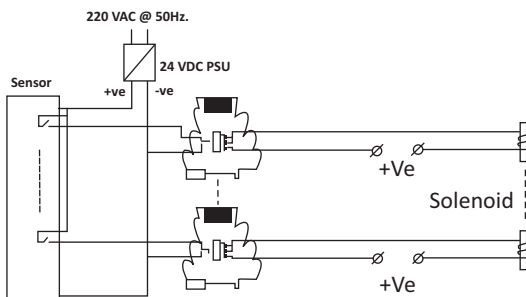

Control Room / Safe Area

Field / Hazardous Area

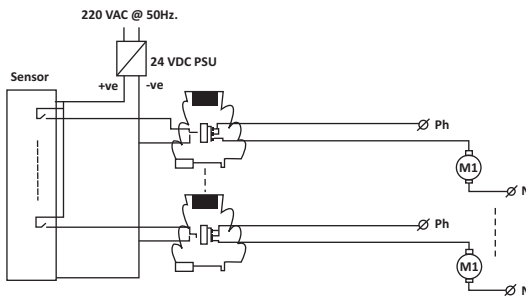

Versions

SR 24 V DD 24 SSR

SR 24 V DA 24 SSR

Base Unit


Pitch (in mm)	6.2
Dimension (Height x width) (in mm)	91.50 x 88.20
Connection Poles	2 Coil Side 3 Contact Side
Connection Possibility	2.5 Sq. mm.
Screw Size	M 2.6
Torque	0.4 Nm

Relay Actuation Data

Input Control Voltage	5-28 VDC	5-28VDC
Input Control Supply Current	5-15 mA	5-15 mA


Relay Output Specification

Contact Configuration	1 NO	1 NO
Relay Voltage	5 - 100 VDC	24 - 280 VAC, 47-63Hz
Rated Current	2 A @55°C	2 A @55°C
Other Technical Data		
ON Time	2.0 m Secs	Zero Crossing Detector Based
OFF Time	<0.04 m Secs	Zero Crossing Detector Based
Operating Temperature	-20°C to 55°C	

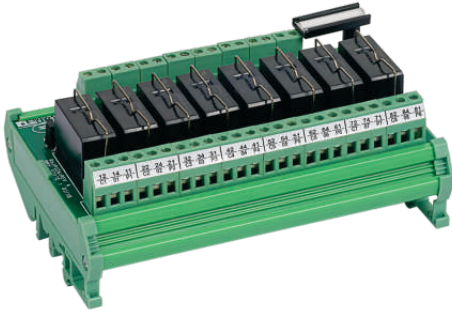

Connection Diagram

1 C/O Electrical Connection
for DC Use.

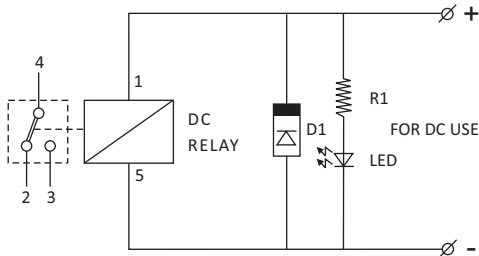

Application:

'elmex' Single Changeover Relay Interface Modules are used mainly for interfacing digital output devices in field. This module implements 1 Form C contact for Relay.

Salient Features:

- Compact Relay-To-Wire assembly of relay units.
- Eliminate Wiring Errors.
- DIN Rail Mounted.
- PVC housing to hold PCB.
- FR4 Grade Double Sided Copper claded PCB.

Sr. No.	Product Code	No. of Relays	Configuration	Dimension LxWxH in mm
1	RMIR 122 TLOD1	1	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	23x77x59
2	RMIR 123 TLOD1	2	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	45x90x64
3	RMIR 124 TLOD1	4	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	90x90x64
4	RMIR 126 TLOD1	8	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	135x90x64
5	RMIR 247 TLOD1	16	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	268x90x64

Input Data

Nominal Actuation Voltage	24 VDC
Nominal Actuation Current	25mA
Protection	Free Wheeling Diode across Coil of relay.
Indication	Voltage presence indication
Terminals	2.5 sq. mm Screw Clamp Connector


General Data

Insulation Resistance	Minimum 1000 MΩ at 500 VDC between each channels
Dielectric Strength	1000 VAC for 1 Minute between channels
Ambient Operation Temperature	80°C
Tropicalisation	Lacquer Coating on both side of PCB
Identification Tag	Provided

Output Data


Contact Type	1 From C - SPDT
Maximum Switching Voltage	250 VAC / 24 VDC
Maximum Switching Current	12 Amp
Output Contact	Potential Free / Dry

*W/o = Without

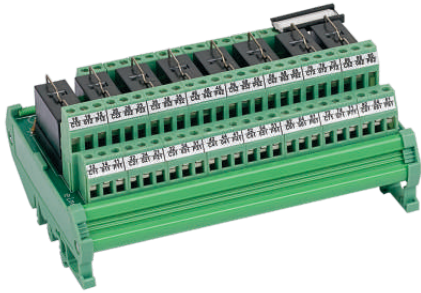

Connection Diagram

2 C/O Electrical Connection
for DC Use.

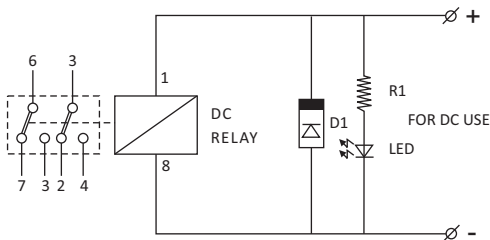

Application:

'elmex' Two Changeover Relay Interface Modules are used mainly for interfacing digital output devices in field. This module implements 2 Form C contact for relay.

Salient Features:

- Compact Relay-To-Wire assembly of relay units.
- Eliminate Wiring Errors.
- DIN Rail Mounted.
- PVC housing to hold PCB.
- FR4 Grade Double Sided Copper claded PCB.

Sr. No.	Product Code	No. of Relays	Configuration	Dimension LxWxH in mm
1	RMIR 104 TLOD1	1	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	23x77x65
2	RMIR 158 TLOD1	2	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	45x90x65
3	RMIR 105 TLOD1	4	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	90x90x65
4	RMIR 081 TLOD1	8	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	135x90x65
5	RMIR 268 TLOD1	16	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	268x90x65

Input Data

Nominal Actuation Voltage	24 VDC
Nominal Actuation Current	25mA
Protection	Free Wheeling Diode across Coil of relay.
Indication	Voltage presence indication
Terminals	2.5 sq. mm Screw Clamp Connector


General Data

Insulation Resistance	Minimum 1000 MΩ at 500 VDC between each channels
Dielectric Strength	1000 VAC for 1 Minute between channels
Ambient Operation Temperature	80°C
Tropicalisation	Lacquer Coating on both side of PCB
Identification Tag	Provided

Output Data


Contact Type	2 From C - DPDT
Maximum Switching Voltage	250 VAC / 30 VDC
Maximum Switching Current	8 Amp
Output Contact	Potential Free / Dry

*W/o = Without

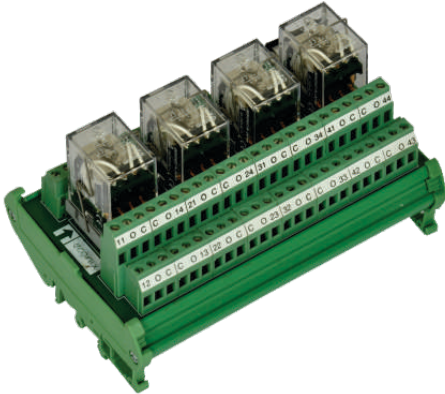

Connection Diagram

4 C/O Electrical Connection
for DC Use.

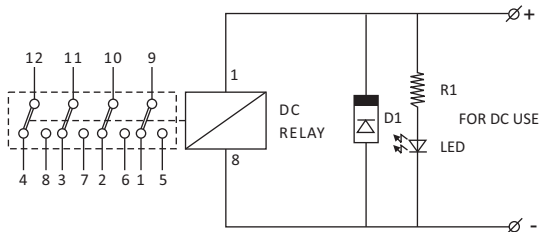

Application:

'elmex' Four Changeover Relay Interface Modules are used mainly for interfacing digital output devices in field. This module implements 4 Form C contact of relay.

Salient Features:

- Compact Relay-To-Wire assembly of relay units.
- Eliminate Wiring Errors.
- DIN Rail Mounted.
- PVC housing to hold PCB.
- FR4 Grade Double Sided Copper claded PCB.

Sr. No.	Product Code	No. of Relays	Configuration	Dimension LxWxH in mm
1	RMIR 177 TLOD1	1	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	45x90x64
2	RMIR 367 TLOD1	2	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	68x90x64
3	RMIR 368 TLOD1	4	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	112x90x64
4	RMIR 370 TLOD1	8	Coil Voltage: 24 VDC W/o* Fuse Holder; Relay mounted on base	268x90x64

Input Data

Nominal Actuation Voltage	24 VDC
Nominal Actuation Current	40mA
Protection	Free Wheeling Diode across Coil.
Indication	Voltage presence indication
Terminals	2.5 sq. mm Screw Clamp Connector


General Data

Insulation Resistance	Minimum 1000 MΩ at 500 VDC between each channels
Dielectric Strength	1000 VAC for 1 Minute between channels
Ambient Operation Temperature	80°C
Tropicalisation	Lacquer Coating on both side of PCB
Identification Tag	Provided

Output Data

Contact Type	4 From C
Maximum Switching Voltage	220 VAC / 24 VDC
Maximum Switching Current	3 Amp
Output Contact	Potential Free / Dry

*W/o = Without

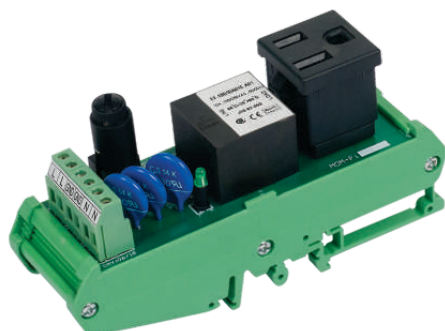

Salient Features:

- Universal Din rail mounting.
- Modules with US power outlet socket. Supplied with AC power through PCB terminals.
- Module with integrated 5 X 20 mm fuse (except version MOM-ECO). The fuse can easily be removed by turning the fuse holder knob, thus provides the function of a circuit breaker (breaks the "L" path).
- LED indicates (except MOM-ECO) when power is present at the outlet socket. Two input terminals are connected in parallel for each path. Makes it easy to loop to other units.
- Economy version available with only terminals and socket (MOM-ECO).
- Versions available with surge protection as well as common mode Referred to earth and differential mode (between L and N) are protected except economy version (MOM-ECO) and current protection version available (MOM-C).
- Versions available with current protection except economy version (MOM-ECO).
- The current is limited to 6.3A except economy version(MOM-ECO).
- Version available with an EMC suppression filter added on module(MOM-Fi).
- Version available with two sockets added on module (MOM-TW).

Technical Specification

Max. AC voltage	125 VAC
Max. current for MOM-C, MOM-SC, MOM-TW, MOM-Fi	6.3A (Fuse 6.3 A lag*)
Max. current for MOM-ECO (without fuse)	6.3A (must be externally fused)
LED	Green: power on output socket
PCB Screw clamp connectors	
Type	ECD2/ ECD3
Make	"elmex"
Housing	Polyamide 6,6 nylon, Grade: UL 94 V2
Colour	Green
PCB Carrier & Moulded parts	
Housing	Polyamide 6,6 nylon, Grade: UL 94 V2
Colour	Green


Ordering Information And Dimensiond Of Module

	MOM - ECO	MOM - C	MOM - SC	MOM - TW	MOM - Fi
LED		✓	✓	✓	✓
ONE US POWER OUTLET SOCKET	✓	✓	✓		✓
TWO US POWER OUTLET SOCKET				✓	
SHORT CIRCUIT PROTECTION		✓	✓	✓	✓
SURGE PROECTION			✓	✓	✓
EMC SUPPRESSION FILTER					✓
DIMENSION (L x W x H) IN mm	40x90x68	40x90x78	40x90x78	40x126x78	40x126x78


1) *Lag Fuse - A built-in delay that allows temporary and harmless inrush currents to pass the fuse or circuit breaker without operating, but is so designed to open on sustained overloads and short circuits. 2) LED Not available in MOM-ECO Module.

Connection Diagram


MOM-ECO

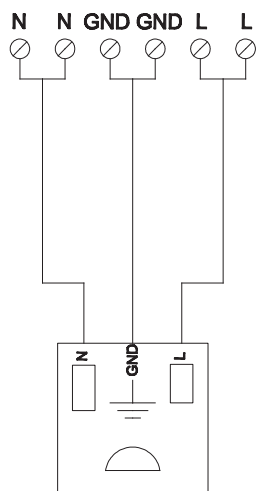


MOM-C

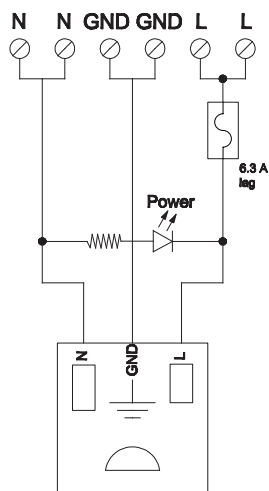


MOM-SC

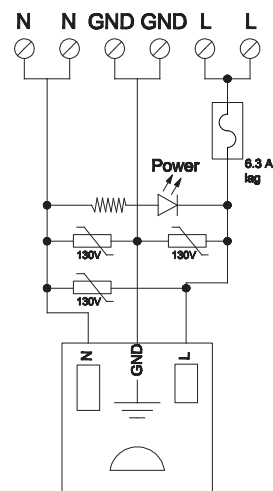

MOM-TW

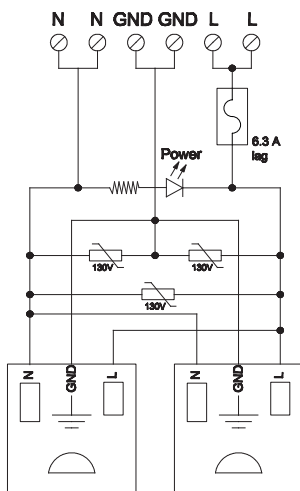


MOM-Fi

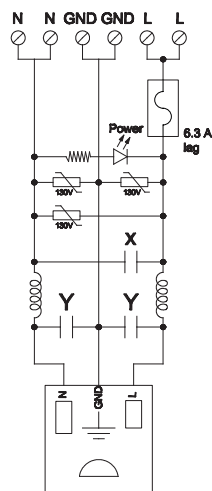




Connection Diagram

INDIVIDUAL DIODE MODULE




INDIVIDUAL DIODE CONNECTED BETWEEN TWO PCB TERMINAL BLOCKS

COMMON ANODE DIODE MODULE



DIODE NETWORK WITH COMMON ANODE AND INDIVIDUAL CATHODE

COMMON CATHODE DIODE MODULE



DIODE NETWORK WITH COMMON CATHODE AND INDIVIDUAL ANODE

Application:

'elmex' Diode Modules come as handy solution for application like reverse blocking using PIV characteristics of diodes. Common place of application are Lamp Test circuits.

Salient Features:

- Housed in fire retardant grade mounting track.
- Ease of connection with the use of standard screw connection PCB Terminal Blocks.
- Available with individual, common anode and common cathode standard diode configurations.
- DIN Rail Mounted.

Sr. No.	Product Code	Configuration	Dimension LxWxH in mm
---------	--------------	---------------	-----------------------

1	3RMI-IDM16	16 Channel Individual Diode	95x90x52
---	------------	-----------------------------	----------

2	3RMI-IDM16CK	32 Channel Common Cathode	95x90x52
---	--------------	---------------------------	----------

3	3RMI-IDM16CA	32 Channel Common Anode	95x90x52
---	--------------	-------------------------	----------

General Specification

Ambient Operating Temperature	-20 to 50°C
Housing Colour	Green
Housing Material	PVC
Mounting Possibility	DIN35

Diode Specifications

Diode Type	1N4007
Maximum Average Forward Rectified Current	1 A
Maximum DC Blocking Voltage (VDC)	1000 V
Maximum DC Reverse Current at Rated DC Blocking Voltage (TA=100°C)	50 µA
Maximum Instantaneous Forward Voltage @ 1 ADC	1.1 V
Maximum Repetitive Peak Reverse Voltage	1000 V

Output Data

Type of Connection	Screw Connection
Min. Wire Size	0.5 mm ²
Max. Wire Size	2.5 mm ²
Min. Wire Size (AWG)	24 AWG
Max. Wire Size (AWG)	12 AWG
Wire Stripping Length	8 mm
Torque	0.5 Nm
Torque	4.5 lb-in



Application:

'elmex' Cable Harnesses are ideal solutions to be used with Sub-D and Insulation Displacement Connectors for automation applications.

Salient Features:

- To connect computer based systems.
- Duplication of input signals.

EWPDGL

Elmex Wire Harness for D-Sub connector with Male / Female at Both Ends

- Available in 9,15,25,37,50 Pin D-sub connector configuration.
- Available in both male / female configuration.
- Available in standard lengths.
- Ordering Code.

E	W	P	D	G	L
Elmex	Wire Harness	Select Pin From 9,15,25,37,50	D-Sub Connector	Male / Female Input & Output	Specify Length X.0

Elmex Wire Harness 15 Pin D-Sub Male Input Female Output with 2.0 meters length can be ordered as EW15DMF2.0.

EWPIIL

Elmex Wire Harness for IDC Connectors

- Available in 10, 14, 16, 20, 26, 34, 40, 50, 64 Pin IDC Connector
- Available in standard lengths
- Ordering Code

E	W	P	I	L
Elmex	Wire Harness	Select Pin From 10,14, 16,20,26,34,40,50,64	IDC Connector	Specify Length X.0

Elmex Wire Harness 20 Pin IDC Connector with 2.0 meters can be ordered as EW20I2.0

Converging Innovations Expanding Solutions



**Solutions For
Connectivity**




**Solutions For
Solar Photovoltaic**



**Solutions For
Metering & Protection**



**Solutions For
Control & Instrumentation**



**Solutions For
Railways**



**Solutions For
Oil & Gas Industry**



Elmex Controls Pvt. Ltd. | Elmex Electric Pvt. Ltd.

12, GIDC Estate, Makarpura, Vadodara -390010, Gujarat, India

☎ 0265-2642021 / 23

✉ marketing@elmex.net

🌐 www.elmex.net

‘elmex’ C&J February 2021

 ElmexControls

 ElmexControls

 ElmexControls

 ElmexControls

 ElmexControls

