DUTKD4

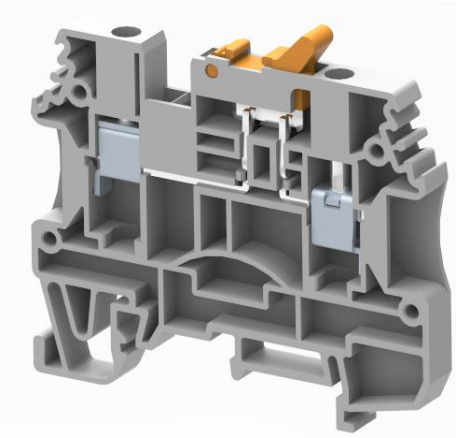

Approval

CE

General Data

Type	DUTKD4
Wire Termination Technology	Screw clamp
Ratings	1000V / 20A / 4mm^2 / 0.5 Nm (Max.: 0.8 Nm)
Screw Size	M3

Dimensions & Weight

Height (mm)	56
Height (inches)	2.20
Width (mm)	62
Width (inches)	2.44
Thickness (mm)	6

Elmex

Material Data

Housing	Polyamide
Standard Color	Grey

Rated Conductor Size

Stranded Wire - min (mm^2)	0.5
Stranded Wire - max (mm^2)	4
Solid Wire - min (mm^2)	0.5
Solid Wire - max (mm^2)	6

Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	1000V
Rated Current (A)	20A
Rated Cross Section (mm^2)	4
Rated torque (Nm)	0.5 Nm (Max.: 0.8 Nm)
Short Time Withstand Current (kA)	0.48 (for 4mm^2) / 0.72 (for 6mm^2)
Rated Impulse Withstand Voltage(kV)	4
Pollution Degree	III
Material group	I

Elmex

Accessories

End plate

DUTKD4EP

Height: 38.25mm

Width : 62mm

Thickness : 1.5mm

Push-in type shorting link:

JPU6

(2W,3W,4W,5W,6W)



Marking Label:

Label KN5.5