


KULT 6



Approvals

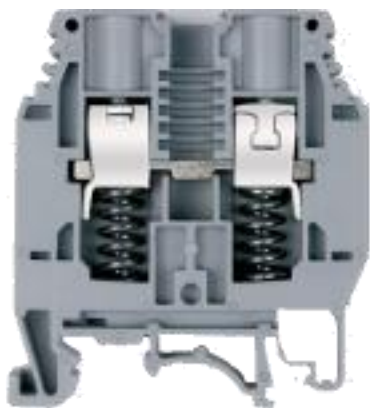

General Data

Type	KULT 6
Wire Termination Technology	Screw Clamp
Ratings	1000 V/41 A/6 sq mm/1.4 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	100
Country of Origin	India
Screw Size	M3.5

Dimensions & Weight

Height (mm)	58.50
Height (inches)	2.30
Width (mm)	52
Width (inches)	2.05
Thickness (mm)	8
Weight For Standard Packing Qty (Kg)	1.98

Material Data

Housing	PA 6,6
Standard Colour	Grey
Other Color Variants	Black, Blue, Green, Khakhi, Red, Yellow

Rated Conductor Size

Stranded Wire - min (sq mm)	0.5
Stranded Wire - max (sq mm)	6
Solid Wire - min (sq mm)	0.5
Solid Wire - max (sq mm)	10

Ratings - IEC

Standard	IEC 60947-7-1
Rated Voltage (V)	1000
Rated Current (A)	41
Rated Cross Section (sq mm)	6
Short Time Withstand Current (kA)	0.72
Rated Impulse Withstand Voltage(kV)	8
Pollution Degree	III

Ratings-ATEX

Certificate No	750
Rated Current (A)	41
Rated Cross Section (sq mm)	6

Ratings-CSA

Rated Voltage (V)	600
Rated Current (A)	45
Wire Cross Section - min (AWG)	24

Wire Cross Section - max (AWG)

8

Ratings-uL

Rated Voltage (V)

600

Rated Current (A)

45

Conductor Size - min (AWG)

24

Conductor Size - max (AWG)

8

Accessories

End Plate

KPSL

Height : 46.60 mm

Width : 52 mm

Thickness : 2.50 mm



Partition Plate With Foot

KBZF

Height : 65 mm

Width : 65 mm

Thickness : 1.50 mm



Protection Cover


PCK3



End Clamp

SCUDD

Height : 50 mm
Width : 55.50 mm
Thickness : 10 mm



SCUSL

Height : 41 mm
Width : 47.50 mm
Thickness : 8 mm



Cross Connection Link Assembly

CCLAK6

((2W, 3W, 4W, 5W, 10W))



Comb-type Shorting Link

SLC 6SL

((2W, 3W, 4W, 5W, 10W))

Height : 100 mm
Width : 0.32 mm



Marking Label

LABEL KN8



Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)

CHK

Height : 7.5 mm

Width : 35 mm

Thickness : 1 mm



CHKD

Height : 15 mm

Width : 35 mm

Thickness : 1.50 mm



CHKDS (Perforated)

Height : 15 mm

Width : 35 mm

Thickness : 1.50 mm



CHKS (Perforated)

Height : 7.5 mm

Width : 35 mm

Thickness : 1 mm



CHS

Height : 15 mm

Width : 32 mm

Thickness : 1.50 mm



Support for Protection Cover

